


Dimensions	Width: 135mm Depth: 23mm
Lengths available	3.6 Metres
Design / finish	Woodgrain & Castle groove
Colour options	Ebony, Grey, Teak & Redwood
Installation options	Concealed clip system
FSC® certification	License code: FSC-C007915
Other	Low slip castle groove option



Test	Method	Result
Slip resistance	BS 7976-2: 2002 + A1:2013	Dry value: 52 Wet value: 37 <i>Castle Groove Option Only</i>
Reaction to fire	EN 13501-1:2007+A1:2009	Cfl-S1, d0
Swelling	EN 15534-4:2014 Section 4.5.5	0.5% thickness 0.1% width 0.1% length
Water absorption	EN 15534-1:2014 Section 8.3.1	0.5%
Resistance to indentation	EN 15534-4:2014 Section 4.5.7 EN 15534-4:2014 Section 4.5.7	Brindell hardness: 104 MPa Rate of elastic recovery: 74%
Impact resistance	EN 15534-1:2014 Section 7.1.1	Charpy impact strength: 4.4 kJ/m ²
Flexural Properties	EN 15523-1:2014 Section 4.5.2 EN 15534-4:2014 Annex A	2925.76 N
Bending Strength	EN 15523-1:2014 Section 4.5.2 EN 15534-4:2014 Annex A	21.50 MPa
Modulus Of Elasticity	EN 15523-1:2014 Section 4.5.2 EN 15534-4:2014 Annex A	1717.26 MPa
Linear thermal expansion	ASTM D696-16	Mean value: 43.8 x10 ⁻⁶ /°C
Resistance to artificial weathering UV 2000 Hours	ASTM D7032-17 Section 4.6 ASTM G154-16 Cycle 1	Exposure time 2000 Hrs Grey scale: 3-4
Freeze / Thaw resistance	ASTM D7032-17 Section 4.7 ASTM D6109-10	MOR: 36.7 MPa Change -3.2% MOE: 4386 MPa Change 0.9%
Density	ASTM D792.13 Method A	Mean value: 1.35 g/cm ³

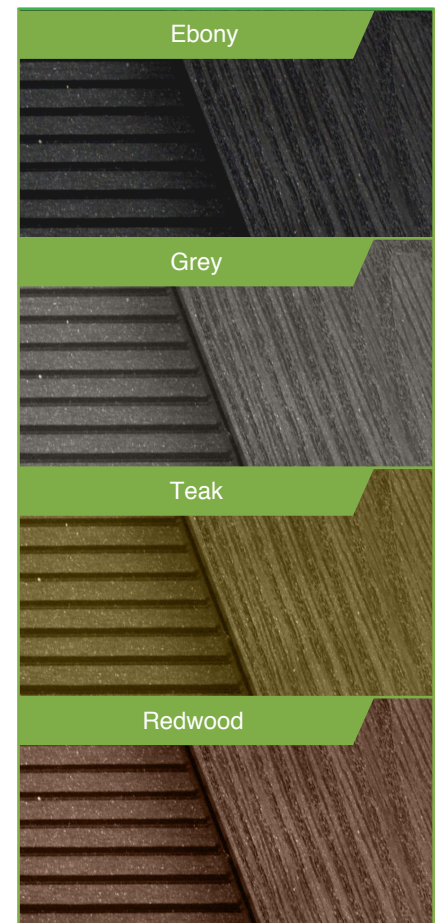

Fixings for concealed clip system			
	Starter clip 30 x 30 x 14mm Stainless steel Black		Locking clip 33 x 18 x 11mm Stainless steel Black
	M3.9 screws & T15 Torx Stainless steel		

For more information on our Victoria range or to arrange a quotation, please call **01438 362 547** or email info@builddeck.co.uk

Full installation instructions available at www.builddeck.co.uk/resources.